


Three-terminal positive voltage regulator

**FEATURES**

- Maximum output current IOM:1.5 A
- Output voltage VO: 8V
- Continuous total dissipation PD: 1.5W

**MECHANICAL DATA**

- Case: TO-252 Small Outline Plastic Package
- Polarity: Color band denotes cathode end
- Mounting Position: Any

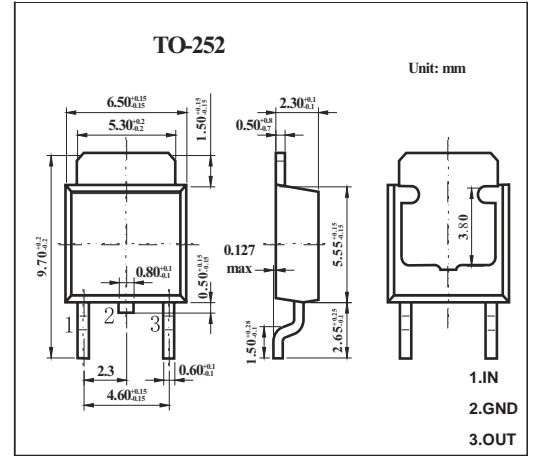

**MAXIMUM RATINGS AND CHARACTERISTICS**

@ 25°C Ambient Temperature (unless otherwise noted)

Parameter	Symbol	Value	Unit
Input Voltage	V <sub>i</sub>	35	V
Thermal Resistance from Junction to Ambient	R <sub>θJA</sub>	66.7	°C/W
Operating Junction Temperature Range	T <sub>OPR</sub>	-25~+125	°C
Storage Temperature Range	T <sub>STG</sub>	-65~+150	°C

**ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE**  
 (V<sub>i</sub>=14V, I<sub>o</sub>=500mA, C<sub>i</sub>=0.33μF, C<sub>o</sub>=0.1μF, unless otherwise specified )


Parameter	Symbol	Test conditions	Min	Typ	Max	Unit	
Output Voltage	V <sub>o</sub>	25°C	7.7	8	8.3	V	
		10.5V≤V <sub>i</sub> ≤23V, I <sub>o</sub> =5mA-1A	-25-125°C	7.6	8	8.4	V
Load Regulation	ΔV <sub>o</sub>	I <sub>o</sub> =5mA-1.5A	25°C		12	160	mV
		I <sub>o</sub> =250mA-750mA	25°C		4	80	mV
Line Regulation	ΔV <sub>o</sub>	10.5V≤V <sub>i</sub> ≤25V	25°C		6	160	mV
		11V≤V <sub>i</sub> ≤17V	25°C		2	80	mV
Quiescent Current	I <sub>q</sub>	25°C		4.3	8	mA	
Quiescent Current Change	ΔI <sub>q</sub>	10.5V≤V <sub>i</sub> ≤25V	-25-125°C			1	mA
		5mA≤I <sub>o</sub> ≤1A	-25-125°C			0.5	mA
Output Voltage Drift	ΔV <sub>o</sub> /ΔT	I <sub>o</sub> =5mA	-25-125°C		-0.8	mV/°C	
Output Noise Voltage	V <sub>N</sub>	10Hz≤f≤100KHz	25°C		52	μV/V <sub>o</sub>	
Ripple Rejection	RR	11.5V≤V <sub>i</sub> ≤21.5V, f=120Hz	-25-125°C	55	72	dB	
Dropout Voltage	V <sub>d</sub>	I <sub>o</sub> =1A	25°C		2	V	
Output Resistance	R <sub>o</sub>	f=1KHz	25°C		10	mΩ	
Short Circuit Current	I <sub>sc</sub>		25°C		450	mA	
Peak Current	I <sub>pk</sub>		25°C		2.2	A	

\* Pulse test.



# RATINGS AND CHARACTERISTIC CURVES

## TYPICAL APPLICATION

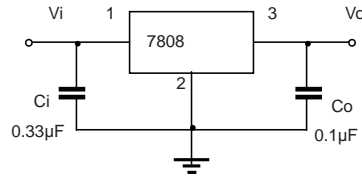

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

