


SOT-23 Plastic-Encapsulate Transistors

Features

- Collector Current Capability $I_C=1A$
- Collector Emitter Voltage $V_{CE0}=100V$
- Complementary to FMMT593
- NPN Transistors

MECHANICAL DATA

- Case style:SOT-23molded plastic
- Mounting position:any

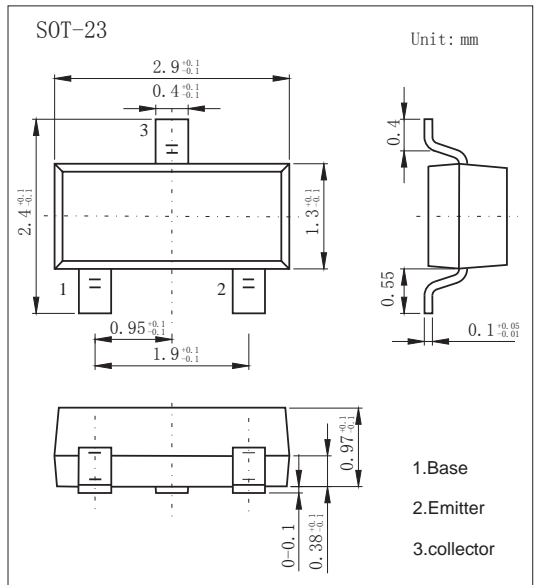

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V_{CBO}	120	V
Collector - Emitter Voltage	V_{CEO}	100	
Emitter - Base Voltage	V_{EBO}	5	
Collector Current - Continuous	I_C	1	A
Collector Current - Pulse	I_{CP}	2	
Base Current	I_B	0.2	
Collector Power Dissipation	P_C	500	mW
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{stg}	-55 to 150	

PACKAGE INFORMATION

Device	Package	Shipping
FMMT493	SOT-23	3000/Tape&Reel

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V_{CBO}	$I_C= 100 \mu A, I_E= 0$	120			V
Collector- emitter breakdown voltage	V_{CEO}	$I_C= 10 mA, I_B= 0$	100			
Emitter - base breakdown voltage	V_{EBO}	$I_E= 100 \mu A, I_C= 0$	5			
Collector-base cut-off current	I_{CBO}	$V_{CB}= 100 V, I_E= 0$			100	nA
Collector- emitter cut-off current	I_{CES}	$V_{CE}= 100 V, I_E= 0$			100	
Emitter cut-off current	I_{EBO}	$V_{EB}= 4V, I_C=0$			100	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=500 mA, I_B=50mA$			0.3	V
		$I_C=1 A, I_B=100mA$			0.6	
Base - emitter saturation voltage	$V_{BE(sat)}$	$I_C=1 A, I_B=100mA$			1.15	
Base - emitter turn-on voltage	$V_{BE(on)}$	$V_{CE}= 10V, I_C= 1 A$			1	
DC current gain (Note.1)	h_{FE}	$V_{CE}= 10V, I_C= 1mA$	100			
		$V_{CE}= 10V, I_C= 250mA$	100		300	
		$V_{CE}= 10V, I_C= 500mA$	60			
		$V_{CE}= 10V, I_C= 1 A$	20			
Collector output capacitance	C_{ob}	$V_{CB}= 10V, f=10MHz$			10	pF
Transition frequency	f_T	$V_{CE}= 10V, I_C= 50mA, f=100MHz$	150			MHz

Note.1: Pulse width=300us. Duty cycle $\leq 2\%$

Marking

Marking	493
---------	-----

■ Typical Characteristics

