

## Three-terminal positive voltage regulator


### FEATURES

- Maximum output current I<sub>OM</sub>: 0.1A
- Output voltage V<sub>O</sub>: 12V
- Continuous total dissipation  
P<sub>D</sub>: 0.625 W (T<sub>a</sub>= 25 °C)

### MECHANICAL DATA

- Case: TO-92 Small Outline Plastic Package
- Polarity: Color band denotes cathode end
- Mounting Position: Any

### TO-92

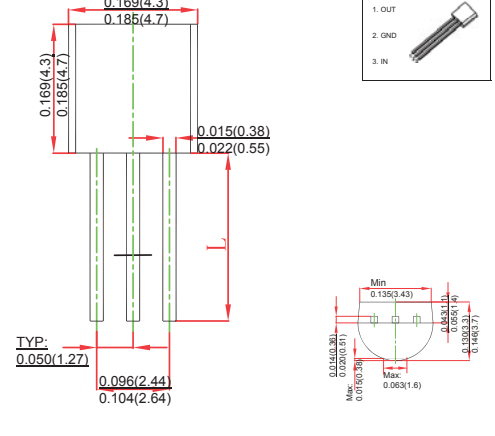

## MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

| Parameter                                   | Symbol           | Value    | Unit |
|---|------------------|----------|------|
| Input Voltage                               | V <sub>i</sub>   | 35       | V    |
| Thermal Resistance from Junction to Ambient | R <sub>θJA</sub> | 166.7    | °C/W |
| Operating Junction Temperature Range        | T <sub>OPR</sub> | -25~+125 | °C   |
| Storage Temperature Range                   | T <sub>STG</sub> | -65~+150 | °C   |


## ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE

(V<sub>i</sub>=19V, I<sub>o</sub>=40mA, C<sub>i</sub>=0.33μF, C<sub>o</sub>=0.1μF, unless otherwise specified)

| Parameter                | Symbol          | Test conditions                     | Min  | Typ  | Max  | Unit              |    |
|--------------------------|-----------------|-------------------------------------|--|------|------|-------------------|----|
| Output voltage           | V <sub>o</sub>  | 25°C                                | 11.5   | 12   | 12.5 | V                 |    |
|                          |                 | 0-125°C                             | 14V ≤ V <sub>i</sub> ≤ 27V, I <sub>o</sub> =1mA-40mA | 11.4 | 12   | 12.6              | V  |
|                          |                 |                                     | I <sub>o</sub> =1mA-70mA                             | 11.4 | 12   | 12.6              | V  |
| Load Regulation          | ΔV <sub>o</sub> | I <sub>o</sub> =1mA-100mA           |  | 22   | 100  | mV                |    |
|                          |                 | I <sub>o</sub> =1mA-40mA            | 25°C   |      | 13   | 50                | mV |
| Line regulation          | ΔV <sub>o</sub> | 14.5V ≤ V <sub>i</sub> ≤ 27V        | 25°C   |      | 55   | 250               | mV |
|                          |                 | 16V ≤ V <sub>i</sub> ≤ 27V          | 25°C   |      | 49   | 200               | mV |
| Quiescent Current        | I <sub>q</sub>  | 25°C                                |  | 4.3  | 6.5  | mA                |    |
| Quiescent Current Change | ΔI <sub>q</sub> | 16V ≤ V <sub>i</sub> ≤ 27V          | 0-125°C  |      |      | 1.5               | mA |
|                          |                 | 1mA ≤ I <sub>o</sub> ≤ 40mA         | 0-125°C  |      |      | 0.1               | mA |
| Output Noise Voltage     | V <sub>N</sub>  | 10Hz ≤ f ≤ 100KHz                   | 25°C   |      | 70   | μV/V <sub>o</sub> |    |
| Ripple Rejection         | RR              | 15V ≤ V <sub>i</sub> ≤ 25V, f=120Hz | 0-125°C  | 37   | 42   | dB                |    |
| Dropout Voltage          | V <sub>d</sub>  | 25°C                                |  | 1.7  |      | V                 |    |

\* Pulse test.

### TYPICAL APPLICATION

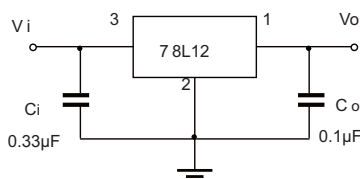


Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.


# RATINGS AND CHARACTERISTIC CURVES

## Typical Characteristics


**Output Characteristics**

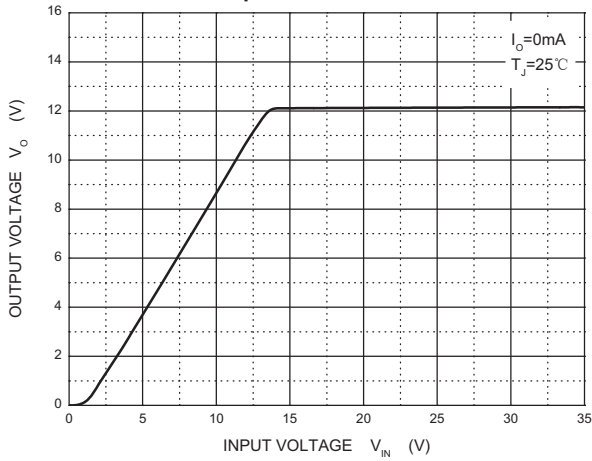


**Dropout Characteristics**

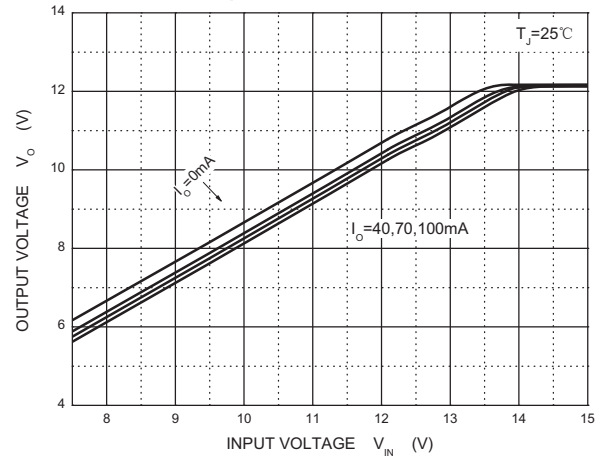


**Quiescent Current**

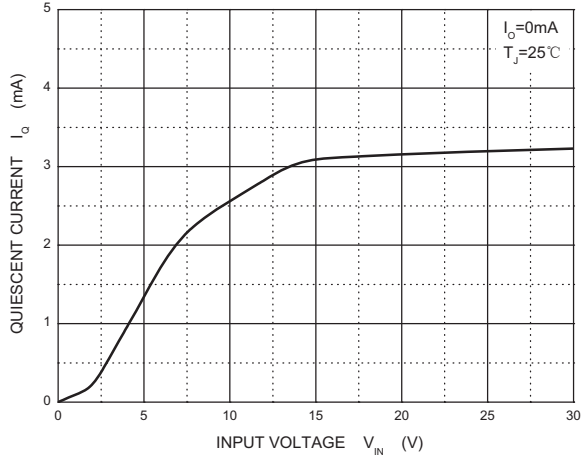

**Current Cut-off Grid Voltage**

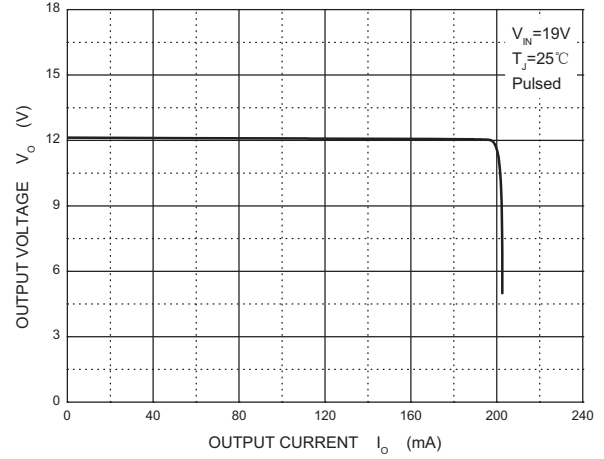

**Output Voltage vs Junction Temperature**

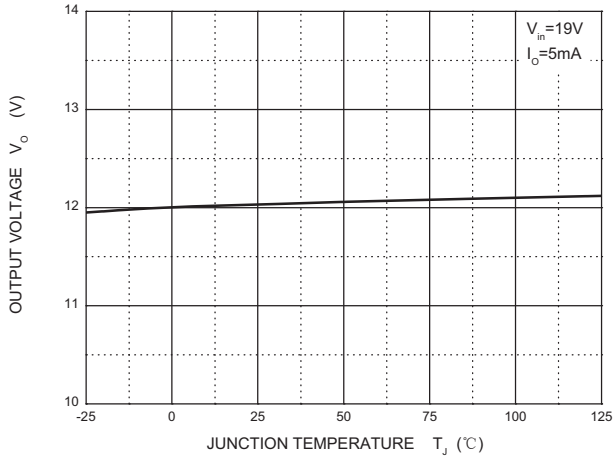

**Power Derating Curve**

