

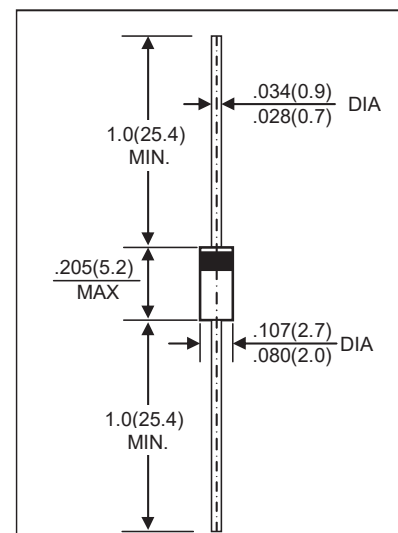
DO-41 High Voltage Plastic Rectifier

FEATURES

- Molded case feature for auto insertion
- High current capability
- Low leakage current High surge capability
High temperature soldering guaranteed:
250 °C /10sec/0.375" (9.5mm) lead length
at 5 lbs tension

MECHANICAL DATA

- Case:DO-41 molded plastic
- Polarity: Color band denotes cathode
- Mounting position:Any



MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)Single phase,half wave,60 Hz,resistive or inductive load.

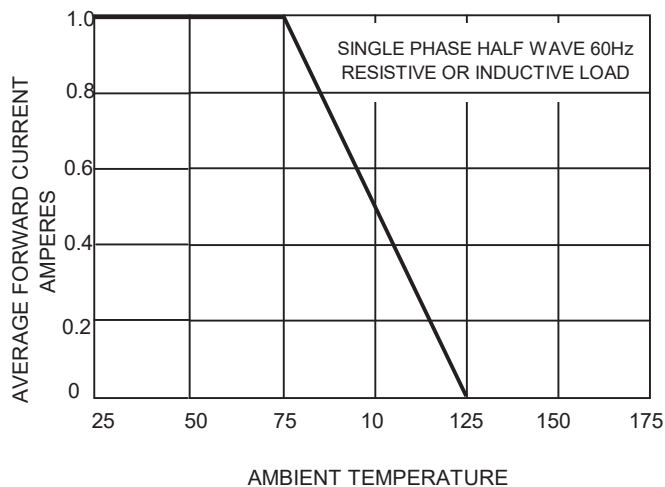
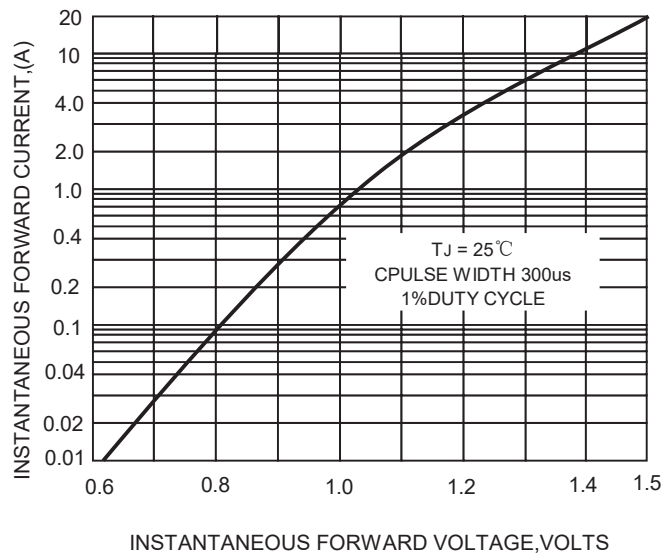
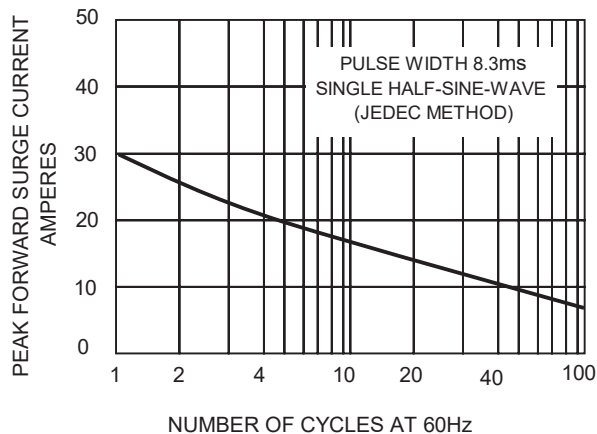
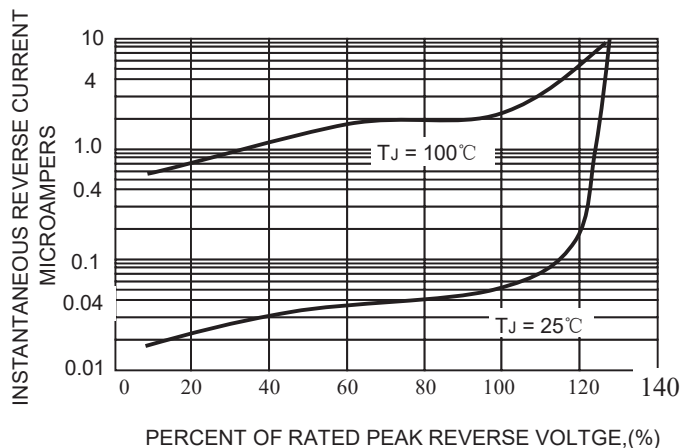
For capacitive load,derate by 20%.

CHARACTERISTICS	SYMBOL	EM513	EM516	EM518	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	1600	1800	2000	V
Maximum RMS Voltage	V_{RMS}	1120	1260	1400	V
Maximum DC Blocking Voltage	V_{DC}	1600	1800	2000	V
Maximum Average Forward Rectified Current 0.375"(9.5mm) Lead Lengths at	$I_{(AV)}$	1.0			A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load	I_{FSM}	30			A
Maximum Instantaneous Forward Voltage at Rated Forward Current	V_F	1.1			V
Maximum DC Reverse Current at Rate DC Blocking Voltage	I_R	5.0 50.0			uA
Typical junction Capacitance (Note1)	C_J	10			pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	50			°C/W
Operating Temperature Range	T_J	-50 to +150			°C
Storage Temperature Range	T_{STG}	-50 to +150			°C

NOTE:1.Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.

2.Thermal Resistance from Junction of ambient at.375" (9.5mm) lead lengths. P.C.board mounted.

RATINGS AND CHARACTERISTIC CURVES

FIG. 1 – FORWARD CURRENT DERATING CURVE

FIG.2-TYPICAL FORWARD CHARACTERISTICS

FIG. 3 – MAXIMUM NON-REPETITIVE SURGE CURRENT

FIG.6-TYPICAL REVERSE CHARACTERISTICS

FIG.5 – TYPICAL JUNCTION CAPACITANCE
