

SCHOTTKY BARRIER RECTIFIER


VOLTAGE RANGE: 20--- 200V CURRENT: 5.0 A

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O Utilizing
- Metal silicon junction ,majority carrier conduction
- Built-in strain relief
- For surface mounted applications
- Low power loss ,high efficiency,High surge capability
- High current capability ,Low forward voltage drop
- For use in low voltage ,high frequency inverters, free wheeling , and polarity protection applications
- High temperature soldering guaranteed:260 °C/10 seconds at terminals
- Component in accordance to RoHS 2002/95/Ec and WEEE 2002/96/EC

MECHANICAL DATA

- Case: SMC molded plastic body
- Terminals:Lead solderable per MIL-STD-750,method 2026
- Polarity:Color band denotes cathode end

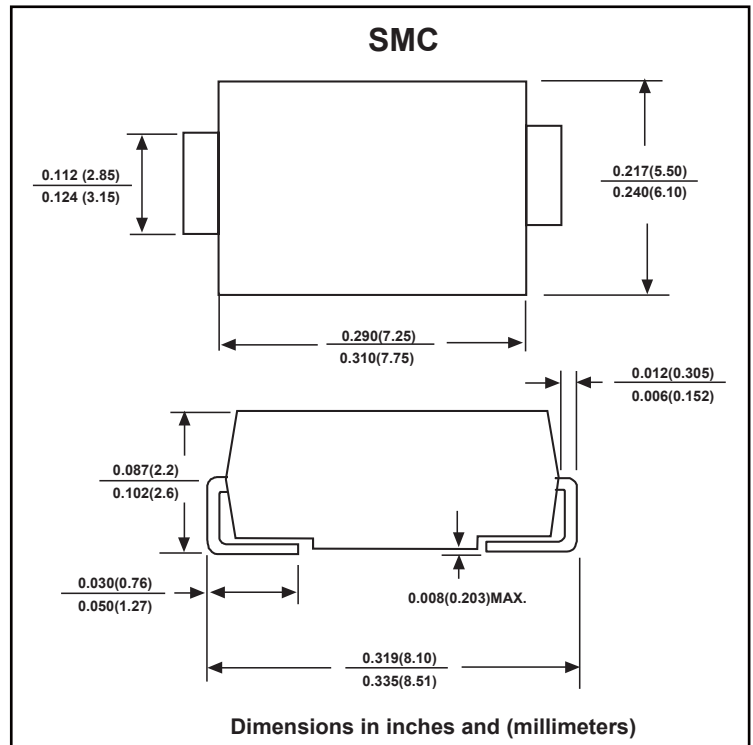

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)Single phase,half wave,60 Hz,resistive or inductive load.

For capacitive load,derate by 20%.

	Symbols	SS 52	SS 53	SS 54	SS 55	SS 56	SS 58	SS 510	SS 515	SS 520	Units	
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	Volts	
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	57	71	105	140	Volts	
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	150	200	Volts	
Maximum average forward rectified current 0.375"(9.5mm) lead length(see fig.1)	I _(AV)	5.0									Amps	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated T _j)	I _{FSM}	150.0									Amps	
Maximum instantaneous forward voltage at 5.0 A(Note 1)	V _F	0.55			0.70		0.85		0.90		0.95	Volts
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1)	I _R	0.2										mA
		50					10					
Typical junction capacitance(Note 3)	C _J	500					400					pF
Typical thermal resistance (Note 2)	R _{θJA}	55.0										°C/W
	R _{θJL}	17.0										
Operating junction temperature range	T _J	-65 to+ 150										°C
Storage temperature range	T _{STG}	-65 to+ 150										°C

Notes: 1. Pulse test: 300 μs pulse width,1% duty cycle

2. P.C.B. mounted 0.55X0.55"(14X14mm) copper pad areas

3. Measured at 1MHz and reverse voltage of 4.0 volts



RATINGS AND CHARACTERISTIC CURVES

FIG.1-FORWARD CURRENT DERATING CURVE

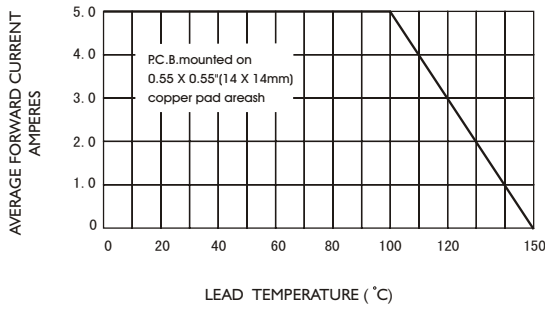


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

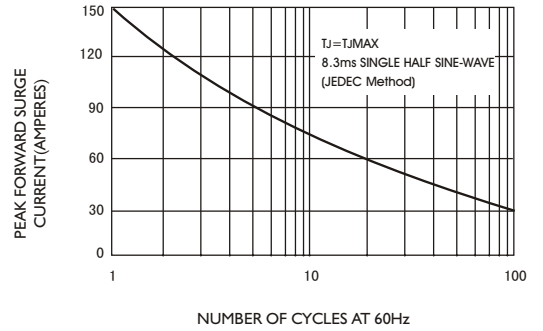


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

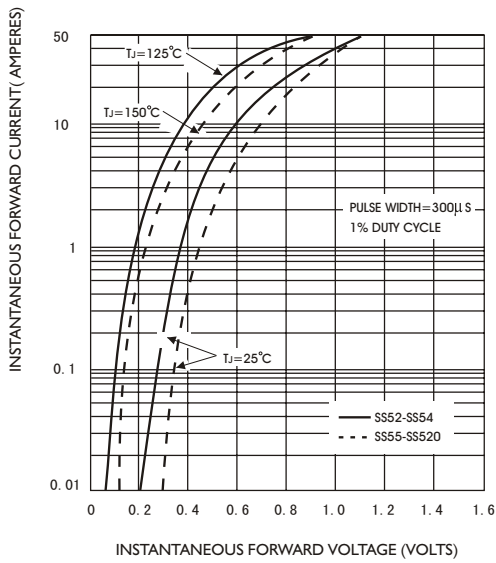


FIG.4-TYPICAL REVERSE CHARACTERISTICS

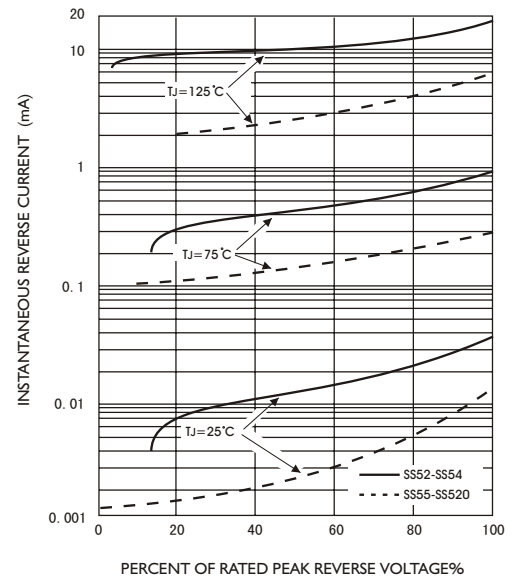


FIG.5-TYPICAL JUNCTION CAPACITANCE

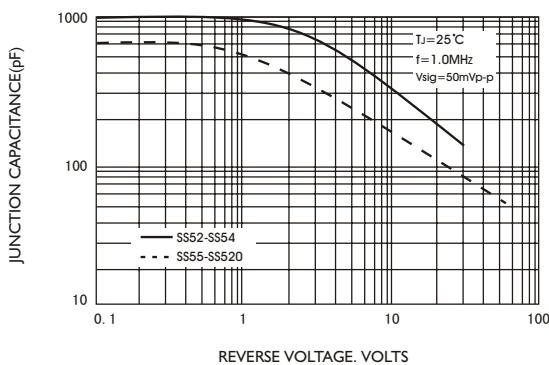


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

