

HIGH EFFICIENCY RECTIFIERS

VOLTAGE RANGE: 50--- 1000 V


CURRENT: 1.0 A

FEATURES

- The plastic package carries Underwrites Laboratory
- Flammability Classification 94V-0
- For surface mounted applications
- Ultra fast switching for high efficiency
- Low reverse leakage
- Built-in strain relief, ideal for automated placement
- High forward surge current capability
- High temperature soldering guaranteed 250 C/10 seconds at terminals

MECHANICAL DATA

- Case style: JEDEC DO-214AC(SMA) plastic molded
- Lead: Plated axial leads, solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any

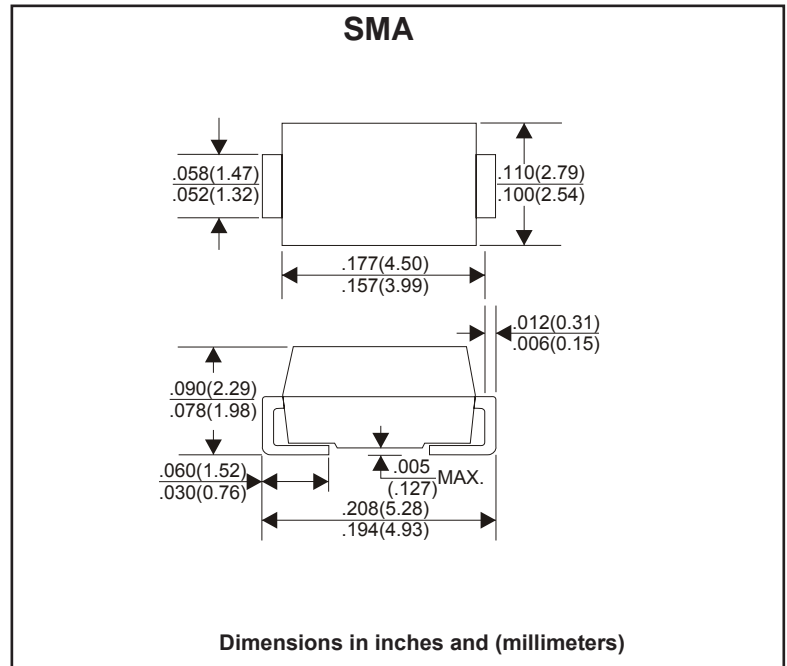

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted) Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate by 20%.

		US1A	US1B	US1E	US1D	US1G	US1J	US1K	US1M	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	150	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	105	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	150	200	400	600	800	1000	V
Maximum Average Forward Rectified Current, 375"(9.5mm) Lead Length at $T_a=55^\circ\text{C}$	$I_{F(AV)}$	1.0								A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30.0								A
Maximum Instantaneous Forward Voltage at 1.0A	V_F	1.0		1.4		1.7			V	
Maximum reverse current at rated DC blocking voltage	@ $T_A=25$	5.0								μA
	@ $T_A=100$	50.0								
Maximum reverse recovery time (Note1)	t_{rr}	50					75			ns
Typical junction capacitance (Note2)	C_J	20					15			pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	50								$^\circ\text{C/W}$
Operating junction temperature range	T_j	- 55 ---- + 125								$^\circ\text{C}$
Storage temperature range	T_{STG}	- 55 ---- + 150								$^\circ\text{C}$

Note: 1.Reverse recovery condition $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$

2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3.P.C.B. mounted with 0.2x0.2"(5.0x5.0mm) copper pad areas



RATINGS AND CHARACTERISTIC CURVES

FIG.1 -- PEAK PULSE POWER RATING CURVE

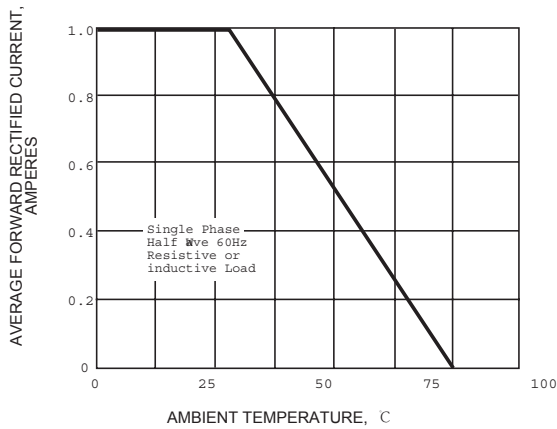


FIG.2 -- PULSE DERATING CURVE

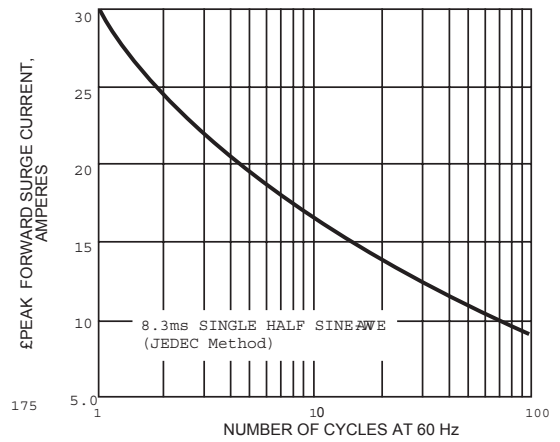


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

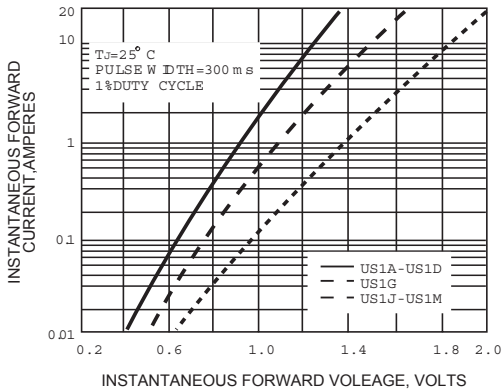


FIG.4-TYPICAL REVERSE CHARACTERISTICS

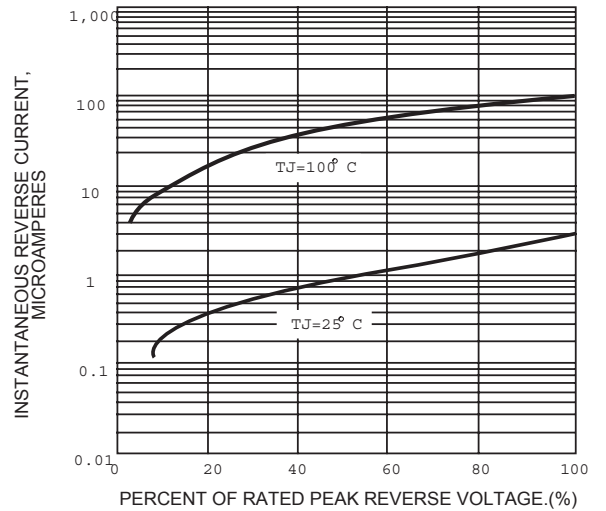


FIG.5 - TYPICAL JUNCTION CAPACITANCE

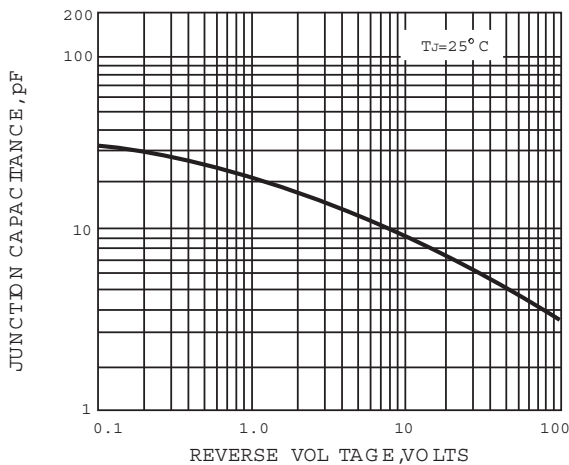


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

